

Summary

The IP-DIO48-OC is the perfect solution for control and monitor of switches and indicators or similar devices. For applications that need to work with a variety of input and output voltages ranging from 0-40 volts, the IP-DIO48-OC offers 48 independent channels on a single wide industry pack. Each of the channels of the IP-DIO48-OC can be configured individually as input / output..

- Single wide Industry Pack module
- Programmable via IP bus
- 8/32 Mhz IP clock support
- Vita 4 compliant



Digital Input / Output Industry Pack 48 Channels I/O, Open Collector



IP-DIO48-OC

Features

- Up to 48 I/O pins Independent programmable
- Direct read-back outputs
- Open Collector VMOS that can sink up to 100mA at voltage up to 40V.
- Very low Ron (2Ω)
- Change of state detection can generate IP Interrupt
- Integrated Altera logic
- Low Threshled 1.6 V Max

I/O Level

- Wide input range from 0V to 40V
- 48 Channels / Digital Input/Outputs
- Time Debouncing feature, Programmable
- Selectable Interrupts (from High to Low or Low to High)

Programmable via

- IP Bus

IP interface

- 8/32 MHz clock
- 16 bit data
- Interrupts

Operating: Environmental

- Operating temperature
Commercial: 0 to +55 °C
Optional: -25°C to +80°C
- Non-operating: -40°C to 85 °C
- Airflow requirement: .5 CFM
- Humidity: 5 to 90% (non-cond.)
- Altitude: 0 to 10'000 ft

Mechanical: Environmental



- Size: Vita 4 Type 1 IP

3.9"

1.8" x

- Power: up to 3.5 watt
- Vibration: 0.5G RMS
20-2000 Hz rand

- Shock: 20 G, 11 ms, ½ sine
- Weight: tbd
- MTBF: >250000 hours

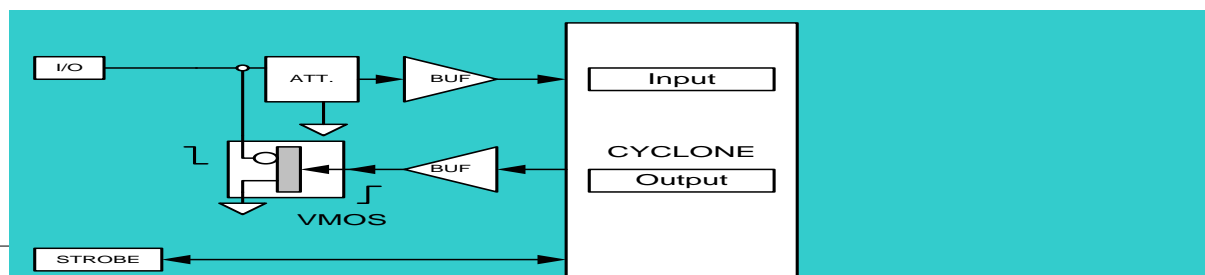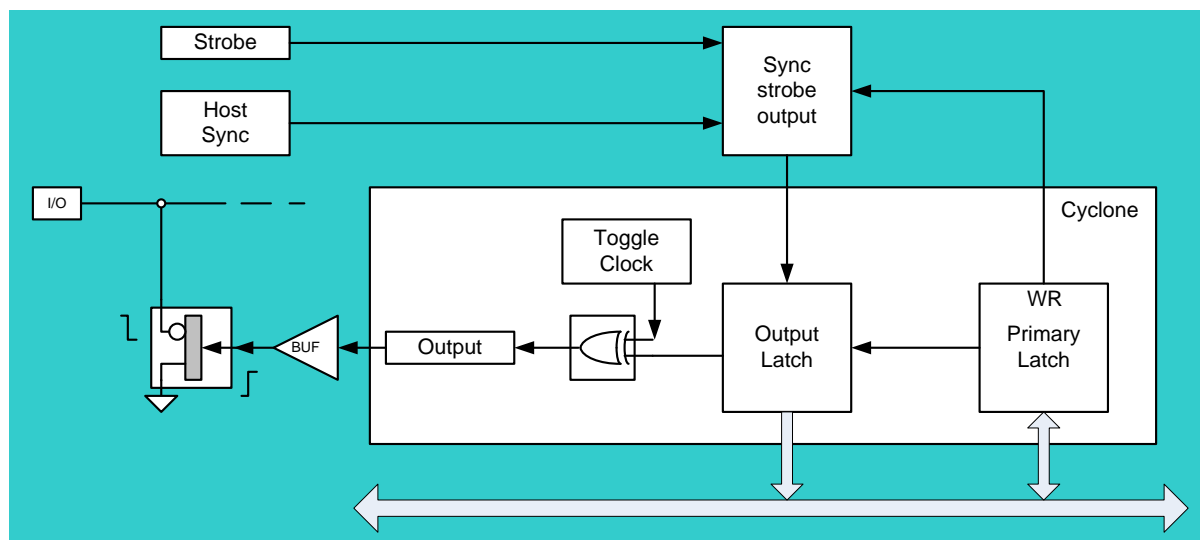

ORDERING INFORMATION

Part Number: IP-DIO48-OC 48 ch. programmable digital I/O
 IP-DIO48-OC-I -40 to +85 C

Optional Accessories

Part Number : TB-50-HDR 50 pin terminal block and 1meter flat ribbon cable
 CBL-50-HDR 50 pin,1meter flat ribbon cable, IDC header connector

Alphi Technology Corporation
 6202 South Maple Ave, Suite 120
 Tempe, Arizona 85283, USA
 Tel: (480) 838 2428
 Fax: (480) 838 4477

For ordering information: sales@alphitech.com Please visit our web site at www.alphitech.com

Products mentioned are trademarks or registered trademarks of their respective holders. Alphi Technology believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice. Copyright © 2007 Alphi Technology Corp. document number: 800-0-002-4100 rev.sr